


PANEL PLAX

Pannelli per recinzioni plasticati
PVC coated panels for enclosures

Confezioni da 50 o 100 pezzi
Packing on pallets of 50 or 100 pcs

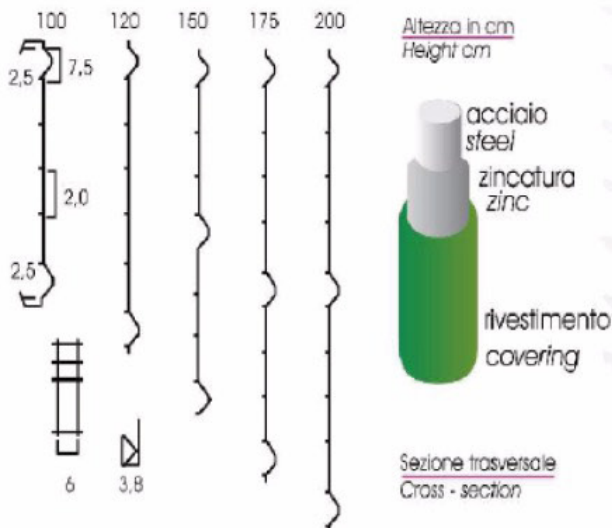

Cod. art. Code	Maglia cm Mesh cm	Altezza cm Height cm	Ø filo mm Wire Ø mm	Rotolo cm Roll cm
804	6x10	80	4	200
805	6x10	100	4	200
806	6x10	120	4	200
807	6x10	150	4	200
808	6x10	170	4	200
809	6x10	190	4	200
750	6x20	100	4	200
760	6x20	120	4	200
770	6x20	150	4	200
780	6x20	170	4	200
790	6x20	190	4	200

CARATTERISTICHE TECNICHE

Pannelli per recinzione di residence, campi sportivi, villette e giardini, nonché aree ad uso commerciale ed industriale. I pannelli sono a maglie rigide, in fili d'acciaio zincati elettrosaldati e plasticati. Le maglie rettangolari, intervallate da nervature di rinforzo, contribuiscono a conferire al pannello una notevole robustezza. La zincatura dei fili è conforme agli standard EN.

Proprietà generali Properties	Valore Standard value	Riferimento norme Regulation
Carico max rottura unitario fili Tensile strenght	N/mm ² 450-550	-
Resistenza punti saldatura Tensile strenght vertical wire	N 757	ASTM. A 185-97
Tipo zincatura Galvanization	A caldo Hot dip galvanizing	UNI - EN 10244-2
Grado purezza Zinco (SHG) Zinc pure (SHG)	~ 99,995%	UNI - EN 1179
Aderenza zinco - Zinc bond	1 ottima - 1 excellent	UNI - EN 10244-2
Peso zinco - Zinc weigh	g/m ² 70	-
Spessore rivestimento zinco Zinc coating	µm ~ 10	-
Colore - Color	Verde - Green	
Tolleranza ø filo zincato Tolerance wire ø	mm ± 0,040	UNI - EN 10218-2

SPECIFICATION

Panels for residence enclosure, sporting fields, cottage and gardens, commercial and areas. The panels are to rigid meshes, made from welded mild steel galvanized wires. Welded by electronic control and subsequently green coated. The rectangular meshes, alternated by reinforcement system, they contribute to confer to the panel a notable sturdiness. The galvanization of wires is conforming to the EN standards.

I dati tecnici sono puramente indicativi. La "Reti Sud Srl" si riserva di apportare modifiche in qualsiasi momento.
Technical data are purely indicative. "Reti Sud Srl" is free to make changes at any time.